

Cat.7 S/FTP Duplex Installation Cable




187331

187332

The equip[®] Duplex Installation Cable is made of preeminent materials and thoroughly examined to meet or surpass industrial standards defined by the EIA / TIA, ISO and EN standard bodies. The performance is guaranteed via a comprehensive test including attenuation, return loss, NEXT (Next End Crosstalk) and FEXT (Far End Crosstalk) up to 1000MHz and the hence the equip[®] Installation Cable serves well in the most demanding networking environments.

| Structure

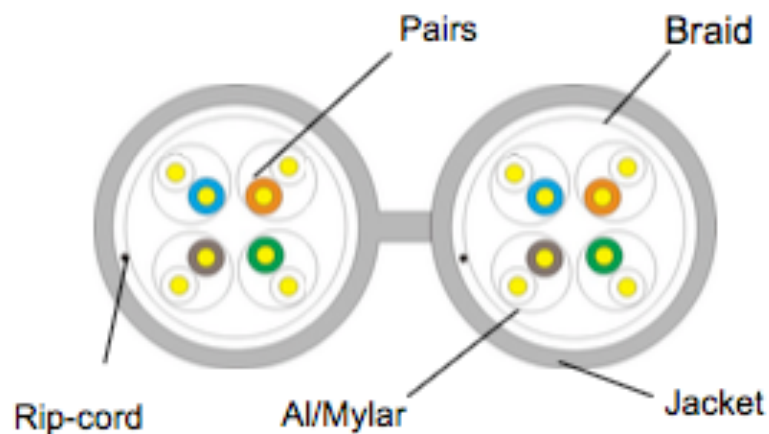



Specification

Conductor	Material	Bare Copper
	Construction	23AWG, 1/0.56 ± 0.05mm
Insulation	Material	Skin-foam-skin PE
	Thickness	MIN at any point: 0.15 mm / MAX AVG:0.22 mm
	Diameter	1.330 ± 0.05mm
	Colors	Blue-White/Blue, Orange-White/Orange, Green-White/Green, Brown-White/Brown
Jacket	Material	LSZH
	Thickness	0.55mm ± 0.05mm
	Diameter	(7.7-16.4) ± 0.5mm
	Colors	Orange (RAL2003)
	Marking	187331: equip CAT.7 Duplex S/FTP LSOH 4PR 23AWG INSTALL CABLE ISO/IEC 11801 & ANSI/TIA-568-C.2 VERIFIED EN50575:2014 Fire Class Eca 187332: equip CAT.7 Duplex S/FTP LSOH 4PR 23AWG INSTALL CABLE ISO/IEC 11801 & ANSI/TIA-568-C.2 VERIFIED EN50575:2014 Fire Class Eca
Reaction to Fire Classification	Eca	

Electrical Properties

Electrical Characteristics	Impedance(Ω) : (1-100MHz)	100±15Ω
	(100-250MHz)	100±18Ω
	(250-600MHz)	100±25Ω
	Delay Skew (ns/100m)	<25
	Velocity of Propagation (%)	74
	unbalanced-to-ground capacitance (pf/100m) max	330
	DC Resistance (Ω/100m) max	9.38
	DC Conductor Resistance Unbalanc (%) max	2

| Performance

Technical Performance (100m):

Frequency (MHz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	PHASE DELAY ≤ns	Frequency (MHz)	PSNEXT ≥dB	ELFEXT ≥dB	PSELFEXT ≥dB
1.0	20.0	2.0	78.0	570.0	1	75.0	78.0	75.0
4.0	23.0	3.74	78.0	552.0	4	75.0	78.0	75.0
8.0	24.5	5.24	78.0	546.7	8	75.0	75.9	72.9
10.0	25.0	5.86	78.0	545.4	10	75.0	74.0	71.0
16.0	25.0	7.41	78.0	543.0	16	75.0	69.9	66.9
20.0	25.0	8.29	78.0	542.0	20	75.0	68.0	65.0
25.0	24.3	9.29	78.0	541.2	25	75.0	66.0	63.0
31.25	23.6	10.41	78.0	540.4	31.25	75.0	64.1	61.1
62.5	21.5	14.88	75.5	538.6	62.5	72.5	58.1	55.1
100	20.1	19.02	72.4	537.6	100	69.4	54.0	51.0
150	18.9	23.56	69.8	536.9	150	66.8	50.2	47.2
200	18.0	27.47	67.9	536.5	200	64.9	48.0	45.0
250	17.3	30.97	66.4	536.3	250	63.4	46.0	43.0
300	17.3	34.19	65.2	536.1	300	62.2	44.5	41.5
600	17.3	50.10	60.7	535.5	600	57.7	38.4	35.4

| Ordering Information

PN	EAN	Length
187331	4015867207918	500m
187332	4015867207925	1000m